

Features

- Supports Links up to 30m using Cat 6a/7 Cable
- SFF-8431 and SFF-8432 MSA Compliant
- IEEE 802.3az Compliant
- Low Power Consumption (2.5W MAX @ 30m)
- Fast Retrain EMI Cancellation Algorithm
- Low EMI Emissions
- I2C 2-Wire Interface for Serial ID and PHY Register Access
- Auto-negotiates with other 10GBase-T PHYs
- Supports 100/1000Base-T using Cat 5e cable or better
- MDI/MDIX Crossover
- Multiple Loopback Modes for Testing and Troubleshooting
- Built-in Cable Monitoring and Link Diagnostic Features
 - Cable Length Measurements
 - Opens/Shorts



- Robust Die Cast Housing
- Bail Latch Style ejector mechanism
- Unshielded and Shielded cable support

Applications

- 1.25 Gigabit Ethernet over Cat 5 cable
- Switch/Router to Switch/Router Link
- High speed I/O for file servers

1. Absolute Maximum Operating Conditions

Parameter	Symbol	Min	Max	Units
Storage Temperature	Ts	-40	85	°C
Case Operating Temperature	Tc	-5	85	°C
Relative Humidity	RH	5	95	%
Supply Voltage (3.3V)	Vcc		3.6	VDC
Low Speed Input Voltage		-0.5	Vcc+0.3	V
Two-Wire Interface Input Voltage		-0.3	Vcc+0.5	V

2. Recommended Operating Conditions

Parameter	Symbol	Min	Typ	Max	Units
Operating Case Temperature	Tc	-5		85	°C
Supply Voltage (3.3V)	Vcc	3.135	3.3	3.465	VDC
Power (30m @ 25C ambient)			2.3	2.5	W

3. Regulatory Requirements

The SFP transceiver installed into the host system requires meeting Compliance Requirements listed in this paragraph.

In order to achieve this, the module must be evaluated in considering its use in the equipment designs. Unless otherwise specified, the transceiver module shall meet the current version, at the time of manufacturing, of the applicable EMI/EMC specifications for telecommunication network and information technology/multimedia equipment.

Radiated Emission (RE)

The transceiver shall meet the applicable FCC Part 15 emission requirements.

10G Base-T CuSFP transceiver minimum emission requirements are:

- Class B radiated emission requirements by using shielded cables at least 4dB margin.

10.0 KHz – 18.0 GHz is recommended frequency range for radiated emission testing.

Electrostatic Discharge (ESD)

In addition the the CuSFP module or host platform shall not show susceptibility to conducted immunity when applied to the interface cable per the requirements of IEC 6100-4-2:

Contact ESD only to the accessible portions of the module (i.e. front panel connector receptacle). 8 kV - Air Discharge and 4 kV - Contact discharge.

- Criteria B (see paragraph 6.7 for Criteria's definition) should be used as a measurable effect from ESD applied (25 discharges by polarity – both air/contact) to the system used with CuSFP modules

Traffic generation and Susceptibility criteria.

Traffic generation and monitoring.

A minimum 50% utilization will should be established for preliminary investigation when possible, with final evaluation being performed with a worst-case utilization.

Susceptibility Criteria:

The disturbances will be applied to the system as a whole. Data losses will be reported according to the following: Performance Criteria:

Performance Criteria A

During the test and after the test, system with CuSFP module shall continue to operate:

- without degradation resulting in no greater than 1% of packets per second dropped,
- with zero requests for retry, beyond requests resulting from the 1% per second allowable data loss
- with no degradation in the data transmission rate, beyond requests resulting from the 1% per second allowable data loss
- without protocol failure
- without loss of link
- without alarm signaling triggered.

Monitoring Method:

The Traffic Generator will be monitored. The link, speed, retry rates, etc, status during the test will be reviewed by equipment status logs after the test, and monitored by LED observation during the test.

Performance Criteria B

Error rate, request for retry and speed of data transmission rate may be degraded during the application of the test. Degradation of the performance as described in criteria A is permitted provided that the normal operation of the EUT is self-recoverable to the condition immediately before the application of the test. In these cases, operator response is not permitted to re-initiate an operation.

Monitoring Method:

The Traffic Generator will be monitored. The link, speed, retry rates, etc, status during the test will be reviewed by equipment status logs after the test, and monitored by LED observation during the test.

Performance Criteria C

Degradation of the performance as described in criteria A is permitted provided that the normal operation of the EUT is self-recoverable to the condition immediately before the application of the test or can be restored after the test by the operator.

Monitoring Method:

The Traffic Generator will be monitored. The link, speed, retry rates, etc, status during the test will be reviewed by equipment status logs after the test, and monitored by LED observation during the test.

Flammability

The PCB of the SFP module shall be min. V-0 UL flame rated. Applicable standards: UL/CSA 60950 and IEC 60950.

4. Environmental and Quality Requirements Accelerated Aging

The SFP+ transceiver module shall be subjected to an accelerated aging test that exposes the module to 85C case temperature while being powered at 3.3V for 2000 hours.

Failure criteria: The product is considered to have failed this test if any of the following occurred:

1. Failure of test unit to perform ping or traffic test;
2. Excessive corrosion of components.

Relative Humidity (Non-Operational)

The SFP+ transceiver module shall be subjected to the temperature and humidity profile as per MIL STD 202G Method 103B,

Test description: The module shall be subjected to the temperature and humidity profile of 85C/85% RH for 1000 hours. The product shall be non-operational during this entire period.

Failure criteria: The product is considered to have failed this test if any of the following occurred:

1. Failure of test unit to perform ping or traffic test;
2. Excessive corrosion of components.

Shock and Vibration

16 10G Base-T SFP+ copper transceivers shall be subject to mechanical shock test and vibration test.

The mechanical shock test shall use the following specification:

A half-sine wave shock shall be applied on the DUT, 5 times per direction for 6 directions. Peak acceleration of the input 1500G. Pulse width of half-sine wave 0.5ms.

Vibration test

The vibration test shall use the following specification:

A random vibration input for a period of 4 min per cycle, 4 cycle per axis.

The input acceleration level shall be 20G over the frequency band of 20 to 2000 Hz.


Failure criteria: The product is considered to have failed this test if any of the following occurred:

1. Failure of test unit to perform ping or traffic test;
2. Excessive corrosion of components.

Temperature Cycling

Thirty-two Modules shall be placed in a temperature cycling chamber (16 operational and 16 non-operational). The temperature extremes shall be -5°C to +85°C. The dwell time at each temperature extreme shall be 10 minutes. The transition time between each temperature extreme shall be 8 minutes. 100 thermal cycles shall be complete. There shall be no evidence of any electrical or physical degradation to the samples, as a result of the thermal cycling.

5. Mechanical Diagram

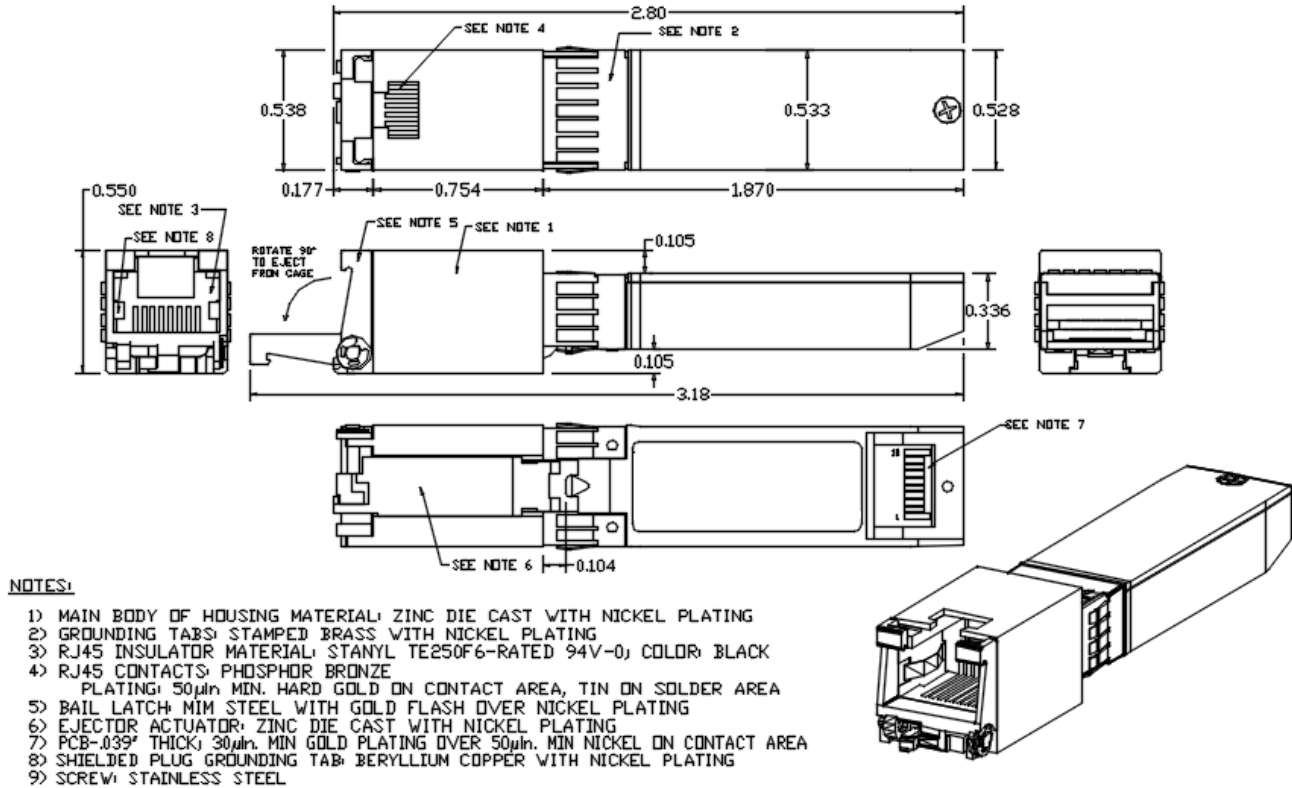

Note: External physical characteristics are subject to variation. This may include, but is not limited to, external case designs, pull tab colors and/or shapes, removal latch styles or colors, and label sizes and placement. These variations do not affect the function or characteristics of the transceivers.

6. Ordering Information

OEM	Part Number	OEM	Part Number
Accedian	7SV-10G-T-A	Fortinet	FS-TRAN-SFP+GC-A
Adtran	1442301F1C-A	Fortinet	FN-TRAN-SFP+GC
Alcatel	SFP-10GIG-T-A	Fujitsu	SFPP-T-10G
Alcatel	SFP-10G-T-ALCATEL-A	HP	813874-B21
Alcatel	SFP-10G-T-ALCATEL-C1	IBM	40K5607-10G-T
Arista	SFP-10G-T-A	Intel	E10GSFPT
Avaya	AA1403043-E6-A	Juniper	SFP-10GE-T
Blade Networks	BN-CKM-10G-T-A	Juniper	SFP-10GE-T-C1
Brocade	E1MG-10G-T-A	Lenovo	7G17A03130-C1
Calix	100-10G-T-A	Marconi	SU56AD-T-10G-A
Ciena	XCVR-10G-T-A	Mellanox	MFM1T02A-10G-T-A

Cisco	GLC-10G-T-I-A	Meraki	MA-SFP-10GB-TX-A
Cisco	GLC-10G-T-A	MSA	AN-SFP-10GBASE-T
Cisco	GLC-10G-T-C1	MSA Champion ONE	10GSFP+E-T
Cisco	10GESFPP-TX-CSC	NetApp	X6568-R6-10G-T-A
Citrix	EW3A-10G-T-A	NetGear	AXM761-10G-T-A
Dell	407-BBWL-A	NoviFlow	400000519-A
Dell	310-7225-10G-A	OnePort	OP-SFP10G-T
Dell	10GESFPP-TX-DLL	PacStar	636-SFP-10GBASE-T-A
Extreme	10338-A	Solarflare	SFM10G-T-A
Extreme	10338-C1	Ubiquiti Networks	UF-RJ45-10G-A
Extreme	10GESFPP-TX-EXN		

7. Contact Information

Tel: 800.590.9535

Web: <http://www.approvednetworks.com>